


## Self-regulating heating cables for roof & gutter snow melting and de-icing

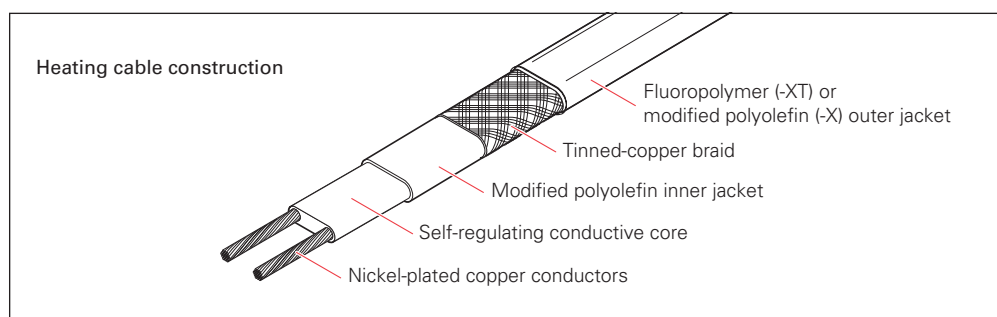

### Product description

Raychem GM-2X and GM-2XT heating cables provide roof and gutter snow melting and de-icing for following applications:

- Roofs comprising standard roofing materials, including slate, shingle, bitumen, tar, wood, metal, and plastic.
- Gutters of standard materials, including metal, plastic, and wood.
- Drainpipes of standard materials, including metal and plastic.

The heating element of a GM-2X(T) consists of a continuous core conductive polymer extruded between two copper conductors. As current flows through the core, the heating cable regulates its heat output in accordance with ambient conditions. The self-regulating feature eliminates hot spots and results in better temperature control to protect roof and gutter materials.

The heating cable is available with a fluoropolymer outer jacket (-XT) which provides maximum abrasion, chemical, and mechanical resistance; or a polyolefin outer jacket (-X) that is more economical for less demanding applications.

### Advantages

#### Low installed cost

The GM-2X (T) heating cable's parallel circuitry allows it to be cut to the exact length. Such characteristics simplify and streamline the design of a roof and gutter snow melting system. Installation is quick and simple. Features that make the snow melting system easy to install in new build projects, or as part of ongoing during building renovation.

### Technical data

Product description and order reference	GM-2XT (PCN 092961-000) GM-2X (PCN 446105-000)
Power Output (nominal)	36 W/m @ 0°C in ice water
Supply Voltage	230 Vac
Max circuit length	80 m
Minimum Installation Temperature	-18°C
Maximum exposure temperature	65°C cont. power on (85°C intermittent)
Product dimensions	13,7 mm x 6,2 mm
Conductors	1,2 mm <sup>2</sup> nickel-plated copper
Braid/Outer Jacket	Tinned-copper braid with fluoropolymer (-XT) or modified polyolefin (-X) outer jacket
Weight	~130 g/m
Minimum Bending Radius	16 mm
Connection Kits	Raychem RayClic or heat shrink connection kits must be used with GM2-X(T) heating cables.

## Approvals



VDE Reg. Nr. 1885



SEMKO

The GM-2X(T) heating cables are VDE and SEMKO Certified, and approved only when used with the appropriate agency-approved Tyco Thermal Controls connection kits and accessories.

## Product References

	Voltage	Max. circuit length				
Circuit breaker size		6 A	10 A	13 A	16 A	20 A
GM2XT and GM-2X	230 V	25 m	40 m	50 m	60 m	80 m

This Raychem product requires the use of a 30mA residual current device (RCD) to provide a maximum safety and protection from fire. All heating circuits have to be protected by C-type circuit breakers.

Tyco is an registered and/or unregistered trademark of Tyco Thermal Controls LLC or its affiliates. All other trademarks are the property of their respective owners.

Important: All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their particular application. Tyco Thermal Controls makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Thermal Controls' only obligations are those in the Tyco Thermal Controls Standard Terms and Conditions of Sale for this product, and in no case will Tyco Thermal Controls or its distributors be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, Tyco Thermal Controls reserves the right to make changes—without notification to Buyer—to processing or materials that do not affect compliance with any applicable specification.

**tyco**  
Thermal Controls

For more information contact your local representative.

### European Headquarters

Tyco Thermal Controls  
Romeinsestraat 14  
3001 Leuven  
Belgium  
Tel. (32) 16 213 511  
Fax (32) 16 213 603

### United Kingdom

Tyco Thermal Controls (UK) Ltd  
3 Rutherford Road,  
Stephenson Industrial Estate  
Washington, Tyne & Wear  
NE37 3HX  
Free phone 0800 96 90 13  
Free fax 0800 96 86 24  
salesUK@tycothermal.com

### Ireland

Free phone 1800 654 241  
Free fax 1800 654 240  
salesIE@tycothermal.com

[www.tycothermal.co.uk](http://www.tycothermal.co.uk)